

## Inlet grate in cast-iron concrete frame

C250 - use max 0.5m into the roadway

# Standard



Code	<b>KM02</b>
Material	<b>Concrete, Cast iron</b>
Weight	<b>82 kg</b>
Norm	<b>DIN1229, EN124-2</b>
Package	<b>16 ks/pal</b>

Grate 500x500mm for street gullies.

### COVER:



- | Straight grate 35 mm between ribs
- | Detachable grate-frame connection
- | Inlet cross-section 910 cm<sup>2</sup>

### FRAME:

- | Cast iron-concrete frame with trap mounting
- | Frame height 160 mm

### OTHER:

- | Mount on adjustment ring 10A.
- | Mortar connection with a strength of at least 45 MPa at least 20 mm high is required between the frame and the top part of the inlet

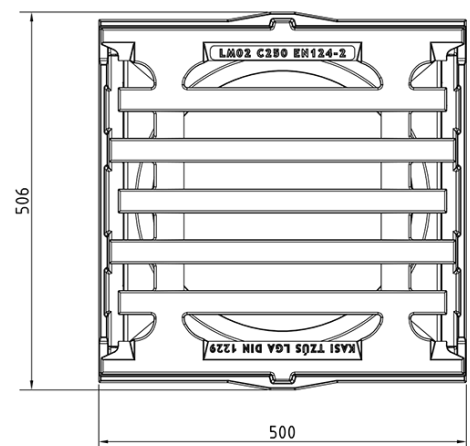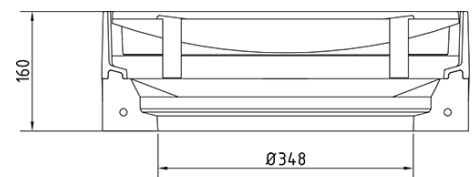

**RAINWATER  
DRAINAGE SYSTEM**

