

Inlet grate in cast-iron concrete frame

C250 - use max 0.5m into the roadway

Standard



| | |
|----------|----------------------------|
| Code | KM09 |
| Material | Concrete, Cast iron |
| Weight | 99 kg |
| Norm | DIN1229, EN124-2 |
| Package | 16 ks/pal |

Grate 500x500mm for street gullies.

COVER:



- | Straight grate 16mm between ribs
- | Detachable grate-frame connection
- | Narrow-slot grate

FRAME:

- | Cast iron-concrete frame with trap mounting
- | Frame height 160 mm

OTHER:

- | Mount on adjustment ring 10A.
- | Mortar connection with a strength of at least 45 MPa at least 20 mm high is required between the frame and the top part of the inlet

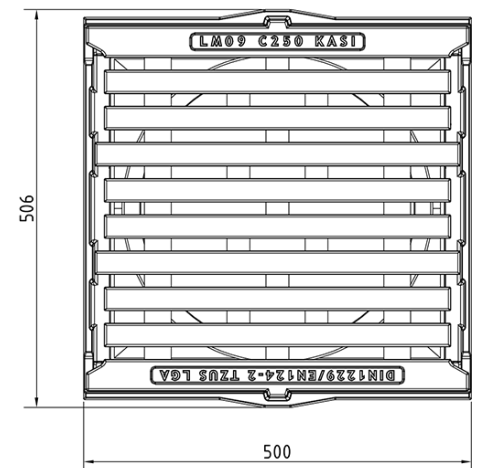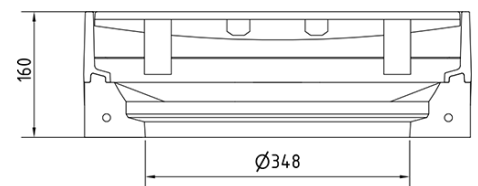

RAINWATER
DRAINAGE SYSTEM

