

Inlet grate in cast-iron concrete frame

D400 - heavy traffic loads

Europa



Code	KM21
Material	Concrete, Cast iron
Weight	70 kg
Norm	EN124-2
Package	16 ks/pal

Grate 500x500mm for street gullies.

COVER:




- | Hinge enabling removal from frame
- | Detachable grate-frame connection
- | Multidirectional grate
- | Inlet cross-section 940 cm²

FRAME:

- | Cast iron-concrete frame with trap mounting
- | Frame height 160 mm
- | PUR damping insert on frame resistant to oil and defrosting agents

OTHER:

- | Mount on adjustment ring 10A.
- | The set is delivered in the final colour finish.
- | Mortar connection with a strength of at least 45 MPa at least 20 mm high is required between the frame and the top part of the inlet

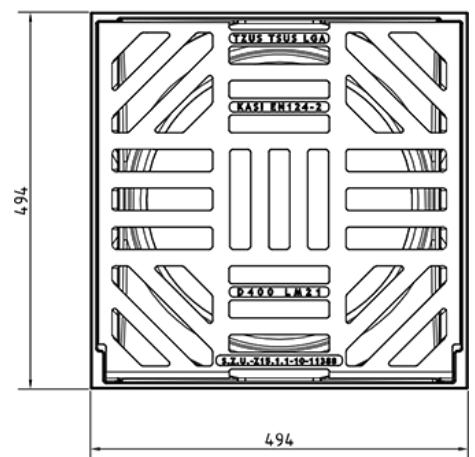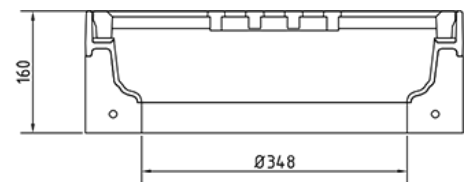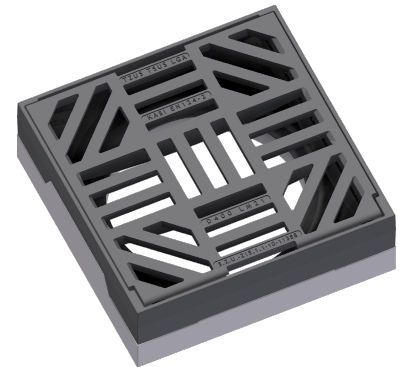

MAX. OPENING
ANGLE



DAMPING INSERT



RAINWATER
DRAINAGE SYSTEM

