

Inlet grate in cast-iron concrete frame

E600 - extreme loads

Europa



| | |
|----------|----------------------------|
| Code | KMA17P |
| Material | Concrete, Cast iron |
| Weight | 93 kg |
| Norm | EN124-2 |
| Package | 16 ks/pal |

Grate 500x500mm for street gullies.

COVER:




- | Hinge secured with pivot preventing removal from frame
- | Straight grate 35 mm between ribs
- | Non-detachable grate-frame connection
- | Inlet cross-section 1300 cm²

FRAME:

- | Cast iron-concrete frame with trap mounting
- | Frame height 160 mm
- | PUR damping insert on frame resistant to oil and defrosting agents

OTHER:

- | Mount on adjustment ring 10A.
- | Mortar connection with a strength of at least 45 MPa at least 20 mm high is required between the frame and the top part of the inlet

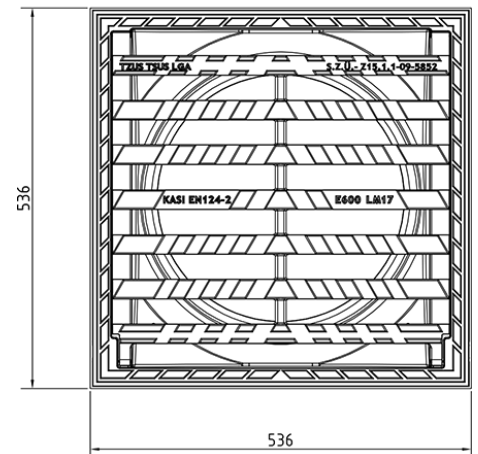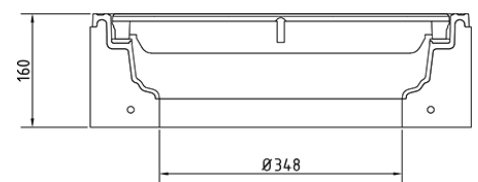

**MAX. OPENING
ANGLE**



**THEFT
PROTECTION**



DAMPING INSERT



**RAINWATER
DRAINAGE SYSTEM**

