

Inlet grille in cast iron frame

C250 - use max 0.5m into the roadway

Europa

| | |
|----------|------------------|
| Code | KML16P |
| Material | Cast iron |
| Weight | 41 kg |
| Norm | EN124-2 |
| Package | 32 ks/pal |

Grate 500x500mm for street gullies.

COVER:



- Hinge secured with a pin against removal from the frame
- Grille curved between ribs 35 mm
- Non-detachable connection of the grille to the frame
- Inlet cross-section 1300 cm²

FRAME:

- Cast iron frame with mounting for trap
- frame height 100 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

OTHER:

- Place on the 10A alignment ring.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

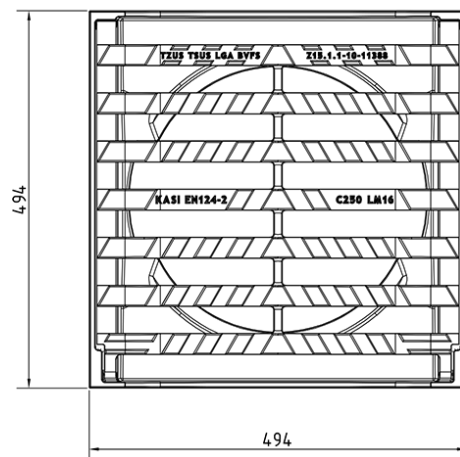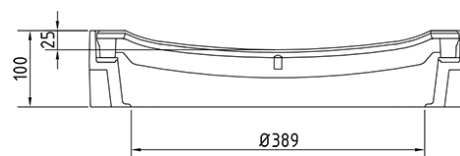

MAX. OPENING
ANGLE



ANTI-THEFT
PROTECTION



DAMPING INSERT



RAINWATER
DRAINAGE