

## Inlet grille in cast iron frame

E600 - extreme load

# Europa



Code	<b>KML19</b>
Material	<b>Cast iron</b>
Weight	<b>47 kg</b>
Norm	<b>EN124-2</b>
Package	<b>32 ks/pal</b>

Grate 500x500mm for street gullies.

### COVER:



- | Hinge with possibility of removal from the frame
- | Grille curved between ribs 35 mm
- | Detachable connection of the grille to the frame
- | Inlet cross-section 1300 cm<sup>2</sup>

### FRAME:

- | Cast iron frame with mounting for trap
- | frame height 100 mm
- | PUR damping insert on the frame resistant to oils and de-icing agents

### OTHER:

- | Place on the 10A alignment ring.
- | There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

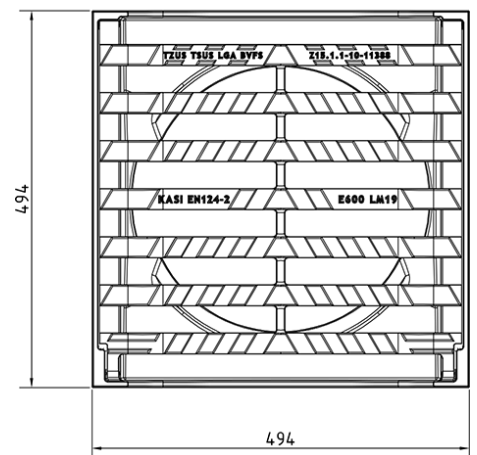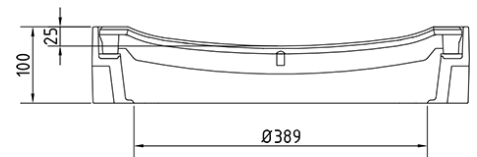

MAX. OPENING  
ANGLE



DAMPING INSERT



RAINWATER  
DRAINAGE

