

Inlet grille in cast iron frame

D400 - heavy traffic load

Europa



Code	KML21P
Material	Cast iron
Weight	44 kg
Norm	EN124-2
Package	32 ks/pal

Grate 500x500mm for street gullies.

COVER:



- Hinge secured with a pin against removal from the frame
- Non-detachable connection of the grille to the frame
- Multidirectional grating
- Inlet cross-section 940 cm²

FRAME:

- Cast iron frame with mounting for trap
- frame height 100 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

OTHER:

- Place on the 10A alignment ring.
- The set is supplied in a painted finish.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

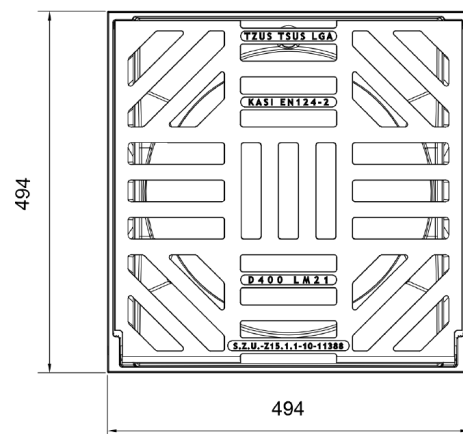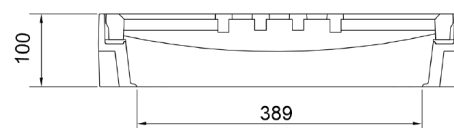

MAX. OPENING
ANGLE



ANTI-THEFT
PROTECTION



DAMPING INSERT



RAINWATER
DRAINAGE