

## Inlet grille in cast iron frame

D400 - heavy traffic load

# Europa



Code	<b>KML22P</b>
Material	<b>Cast iron</b>
Weight	<b>45 kg</b>
Norm	<b>EN124-2</b>
Package	<b>32 ks/pal</b>

Grate 500x500mm for street gullies.

### COVER:



- Hinge secured with a pin against removal from the frame
- Non-detachable connection of the grille to the frame
- Multidirectional grating
- Inlet cross-section 940 cm<sup>2</sup>

### FRAME:

- Cast iron frame with mounting for trap
- frame height 100 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

### OTHER:

- Place on the 10A alignment ring.
- The set is supplied in a painted finish.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

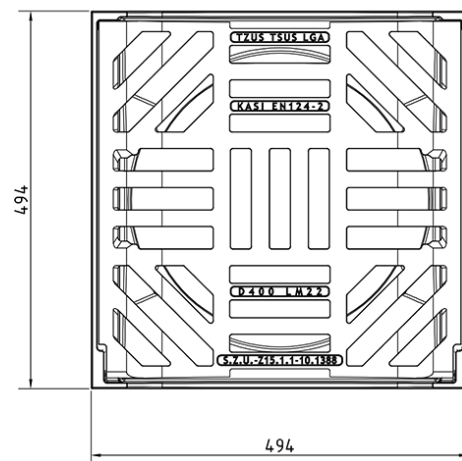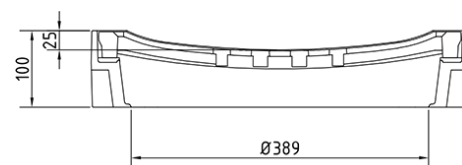

**MAX. OPENING  
ANGLE**



**ANTI-THEFT  
PROTECTION**



**DAMPING INSERT**



**RAINWATER  
DRAINAGE**