

## Inlet grille in cast iron frame

D400 - heavy traffic load

## Europa



Code	KMW12PCS
Material	Cast iron
Weight	42 kg
Norm	EN124-2
Package	10 ks/pal

Grate 500x500mm for street gullies.

### COVER:



- Hinge secured with a pin against removal from the frame
- Straight grille between ribs 35 mm
- Non-detachable connection of the grille to the frame
- Inlet cross-section 1300 cm<sup>2</sup>

### FRAME:

- Cast iron frame with mounting for trap
- frame height 100 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

### OTHER:

- Place on the 10A alignment ring.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

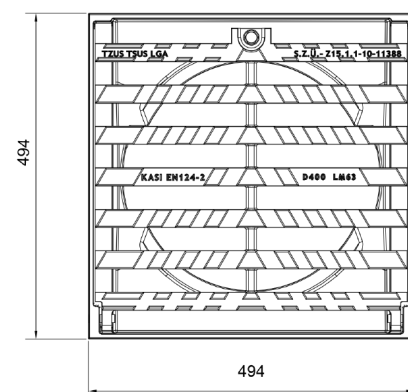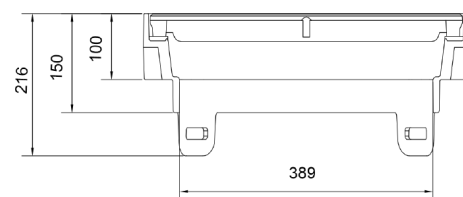

MAX. OPENING  
ANGLE



ANTI-THEFT  
PROTECTION



DAMPING INSERT



RAINWATER  
DRAINAGE