

## Manhole cover without ventilation in a square frame

C250 - use max 0.5m in the roadway and truck parking lot

## Standard

Code	KCC11
Material	Concrete, Cast iron
Weight	104 kg
Norm	EN124-2
Package	12 ks/pal

without hinge, without shock-absorbing lining, without spring-loaded lid locking in frame

### COVER:




- | Cast iron without venting with anti-slip design.
- | Hinge secured against removal from the frame
- | Safety lock at 90°
- | Custom theme/logo option
- | Lid weight 28kg

### FRAME:

- | Frame height 125 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Lid safety lock at 90°
- | custom lid motif possible

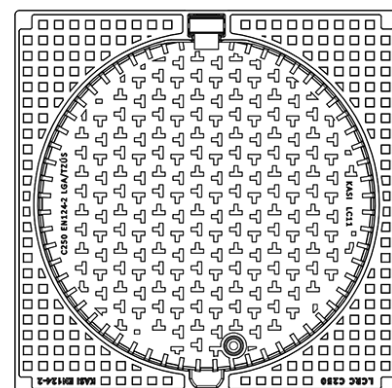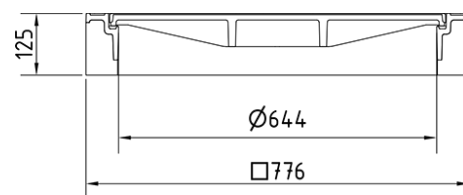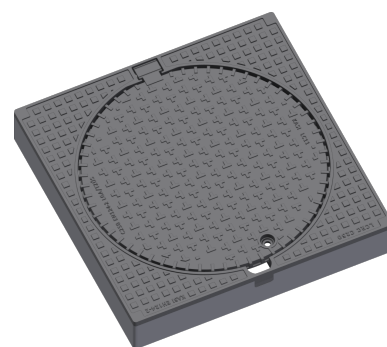

CUSTOMER  
SOLUTIONS



DAMPING INSERT



MAX. OPENING  
ANGLE



ANTI-THEFT  
PROTECTION