

Manhole cover with ventilation in a cast-iron concrete frame

D400 - light traffic load

Europa 7



Code	KDA72
Material	Concrete, Cast iron
Weight	108 kg
Norm	EN124-2
Package	10 ks/pal
Load class	Light traffic load

Poklop EUROPA 7 s pantem, víko litina s ventilací s uzavřeným pantem, pružinové zajištění víka v rámu, D400, rám beton-litina v.160mm s osazením pro lapač, horizontální PUR tlumící vložka na rámu

COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Machined lid seating surface to 0.3mm
- | Cast iron with ventilation and anti-slip design.
- | Hinge secured against removal from the frame
- | Safety lock at 90°

FRAME:

- | Cast-concrete frame with mounting for trap
- | Frame height 160 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance

OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | only with UL7 three-arm trap
- | Option of screw locking
- | Suitable for places with light traffic load
- | Lid safety lock at 90°

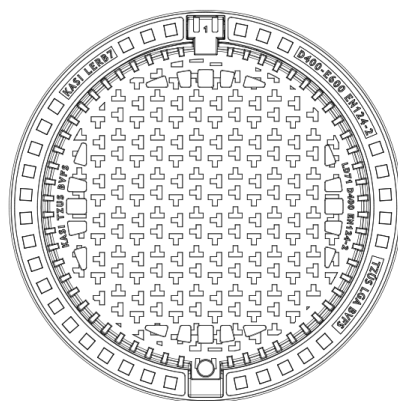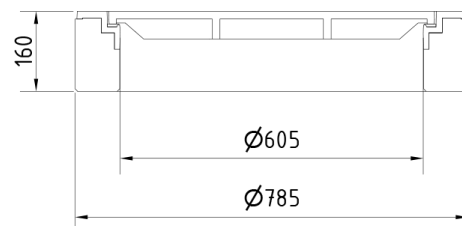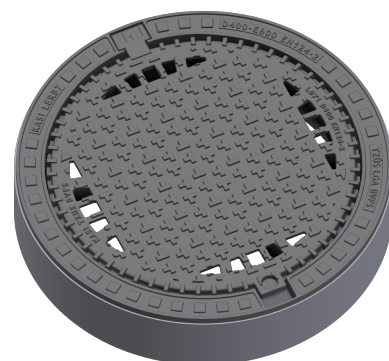

**CUSTOMER
SOLUTIONS**



DAMPING INSERT



**MAX. OPENING
ANGLE**



**ANTI-THEFT
PROTECTION**