

## Manhole cover without ventilation in cast iron-concrete frame D400 - extreme traffic loads

### Standard



Code	<b>KDB62</b>
Material	<b>Concrete, Cast iron</b>
Weight	<b>162 kg</b>
Norm	<b>DIN1229, EN124-2</b>
Package	<b>8 ks/pal</b>
Load class	<b>Extreme traffic load</b>

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame

#### COVER:




- | Lid weight 91 kg
- | Integrated KASI-PUR damping insert with high resistance
- | With concrete fill without ventilation – unattractive to thieves

#### FRAME:

- | Frame height 160 mm, weight 71 kg
- | Use with BAR-V and BAR adjustment rings
- | Cast iron-concrete frame without trap mounting
- | Integrated PUR damping insert with high resistance
- | Suitable for places with extreme traffic loads

#### OTHER:

- | Hatch comes without coating – painted options can be ordered

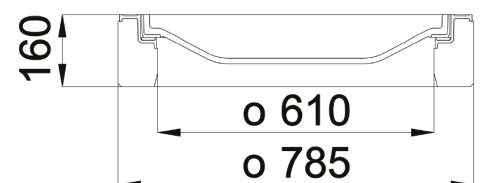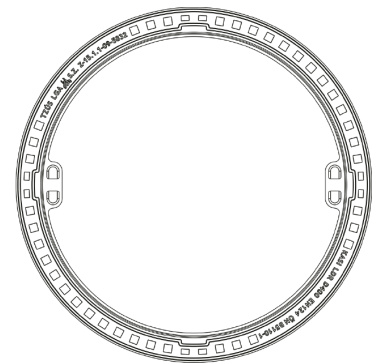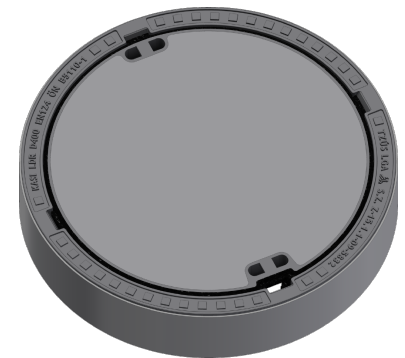

DAMPING INSERT



CONCRETE AND  
CAST IRON LID



HATCH WITHOUT  
HINGE

