

## Manhole cover with ventilation in a cast-iron concrete frame

D400 - heavy traffic load

## Europa 9



|            |                            |
|------------|----------------------------|
| Code       | <b>KDB92</b>               |
| Material   | <b>Concrete, Cast iron</b> |
| Weight     | <b>116 kg</b>              |
| Norm       | <b>EN124-2</b>             |
| Package    | <b>10 ks/pal</b>           |
| Load class | <b>Heavy traffic load</b>  |

Poklop EUROPA 9 s pantem, víko litina s ventilací s uzavřeným pantem, pružinové zajištění víka v rámu, D400, rám beton-litina v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

### COVER:



- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron with ventilation and anti-slip design.
- | Hinge secured against removal from the frame
- | Safety lock at 90°
- | Lid weight 37kg

### FRAME:

- | Cast-concrete frame without mounting for the trap
- | Frame height 160 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with high traffic load
- | Lid safety lock at 90°
- | custom lid motif possible

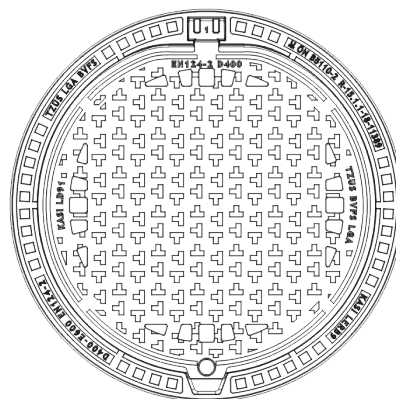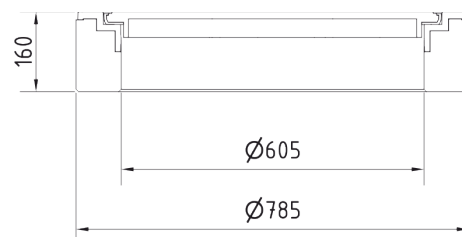

CUSTOMER  
SOLUTIONS



DAMPING INSERT



MAX. OPENING  
ANGLE



ANTI-THEFT  
PROTECTION