

Inlet grille in the distribution frame

D400 - extreme traffic load

Europa 9

Code	KDG9M
Material	Concrete, Cast iron
Weight	326 kg
Package	5 ks/pal
Load class	Extreme traffic load

Poklop EUROPA 9 s pantem, víko litina kruhová vtoková mříž s uzavřeným pantem, pružinové zajištění víka v rámu, D400, rám beton-litina roznášecí DN1200 v.200mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

COVER:




- Integrated KASI-PUR damping insert with high resistance
- Hinge secured against removal from the frame
- Safety lock at 90°
- Lid weight 37kg
- Securing the lid in the frame with multi-point springs

FRAME:

- Distribution frame 1200mm without mounting for catcher
- Frame height 200 mm
- Machined frame contact surface to 0.1mm
- Use with BAR-V and BAR adjustment rings
- Three handling hinges

OTHER:

- The cover is supplied without surface treatment - painted variants can be ordered
- Option of screw locking
- Suitable for places with extreme traffic load
- Lid safety lock at 90°

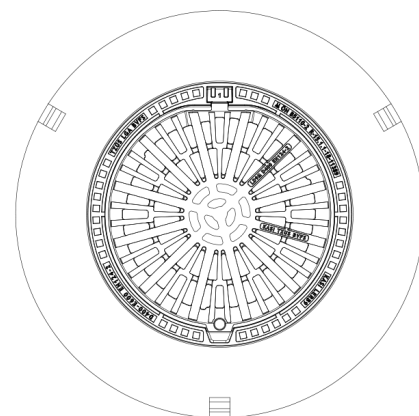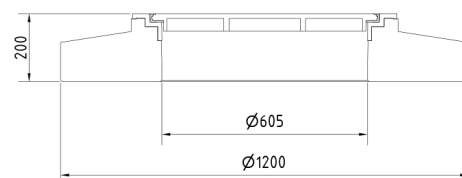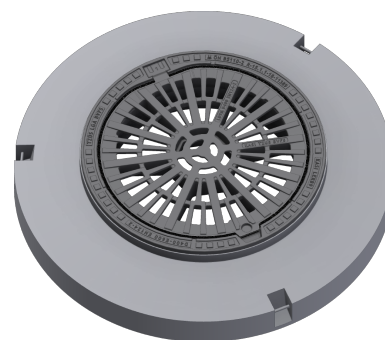

DAMPING INSERT



MAX. OPENING
ANGLE



ANTI-THEFT
PROTECTION



RAINWATER
DRAINAGE