

## Inlet grille in the distribution frame

D400 - extreme traffic load

# Europa 9



|            |                             |
|------------|-----------------------------|
| Code       | <b>KDG9N</b>                |
| Material   | <b>Concrete, Cast iron</b>  |
| Weight     | <b>326 kg</b>               |
| Package    | <b>5 ks/pal</b>             |
| Load class | <b>Extreme traffic load</b> |

Poklop EUROPA 9 s pantem, víko litina kruhová vtoková mříž s otevřeným pantem, pružinové zajištění víka v rámu, D400, rám beton-litina roznášecí DN1200 v.200mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

### COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Hinge with possibility of removal from the frame
- | Safety lock at 90°
- | Lid weight 37kg
- | Securing the lid in the frame with multi-point springs

### FRAME:

- | Distribution frame 1200mm without mounting for catcher
- | Frame height 200 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings
- | Three handling hinges

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with extreme traffic load
- | Lid safety lock at 90°

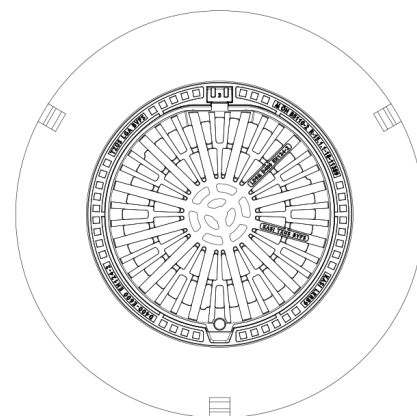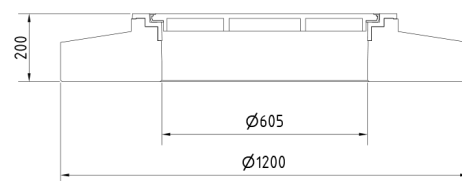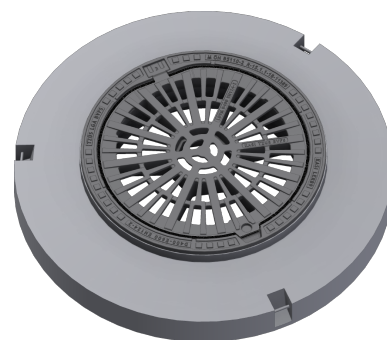

DAMPING INSERT



MAX. OPENING  
ANGLE



RAINWATER  
DRAINAGE