

## Manhole cover without ventilation in cast iron frame with foot

D400 - light traffic load

# Standard



|            |                            |
|------------|----------------------------|
| Code       | <b>KDK62</b>               |
| Material   | <b>Concrete, Cast iron</b> |
| Weight     | <b>114 kg</b>              |
| Norm       | <b>DIN1229, EN124-2</b>    |
| Package    | <b>10 ks/pal</b>           |
| Load class | <b>Light traffic load</b>  |

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

### COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | With concrete filling without ventilation - uninteresting for thieves
- | Lid weight 91kg

### FRAME:

- | Cast iron frame with foot with catcher attachment
- | Frame height 100 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance

### OTHER:

- | Suitable for places with light traffic load
- | chemical resistance of concrete XF4

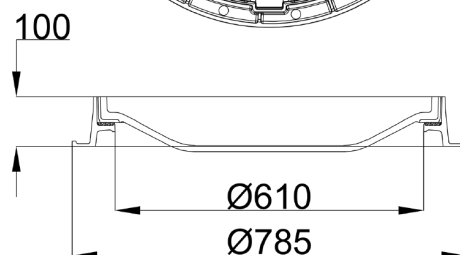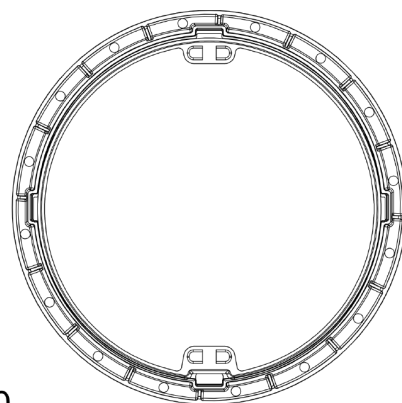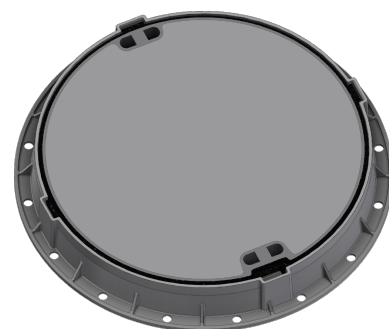

DAMPING INSERT



CONCRETE-CAST  
IRON LID



HATCH WITHOUT  
HINGE

