

## Manhole cover with ventilation in self-levelling frame

D400 - extreme traffic loads

# Standard



|            |                             |
|------------|-----------------------------|
| Code       | <b>KDM61</b>                |
| Material   | <b>Concrete, Cast iron</b>  |
| Weight     | <b>120 kg</b>               |
| Norm       | <b>DIN1229, EN124-2</b>     |
| Package    | <b>10 ks/pal</b>            |
| Load class | <b>Extreme traffic load</b> |

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame

### COVER:


- | Lid weight 90 kg
- | Integrated KASI-PUR damping insert with high resistance
- | With concrete fill with ventilation – unattractive to thieves

### FRAME:



- | Frame height 160 mm, weight 30 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation in the running layer and load transfer outside the well
- | Installation without guide ring – frame can be inserted directly into well

### OTHER:

- | Hatch comes without coating – painted options can be ordered

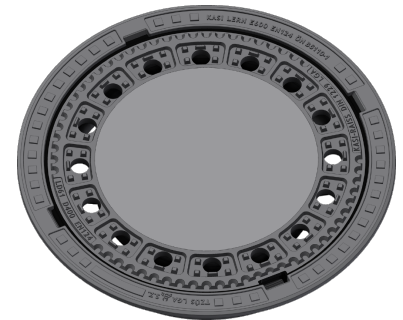

KDM61

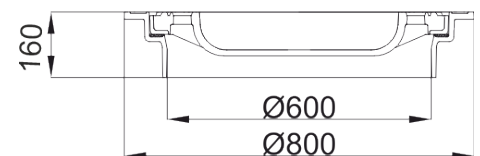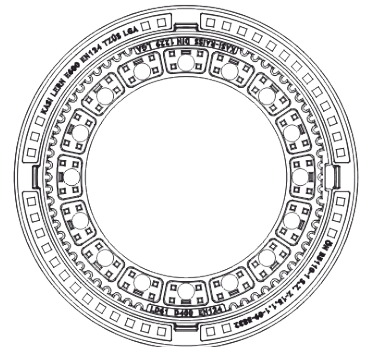

DAMPING INSERT



CONCRETE AND  
CAST IRON LID



HATCH WITHOUT  
HINGE

