Technical sheet

Manhole cover without ventilation in self-leveling frame

D400 - extreme traffic load

Standard

D400 TIR DN 600

Code	**KDM62**
Material	**Concrete, Cast iron**
Weight	**121 kg**
Norm	**DIN1229, EN124-2**
Package	**10 ks/pal**
Load class	**D400**
Traffic load	**Extreme traffic load**

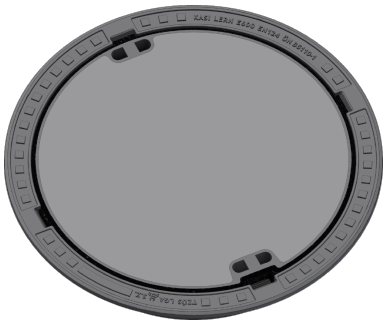

KDM62

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

COVER:

- Integrated KASI-PUR damping insert with high resistance
- With concrete filling without ventilation - uninteresting for thieves
- Lid weight 91kg

FRAME:

- Self-leveling frame without mounting for trap
- Frame height 160 mm
- Use with BAR-V and BAR adjustment rings
- Installation without guide ring - the frame can be inserted directly into the shaft
- Installation in the running layer and load transfer even outside the shaft

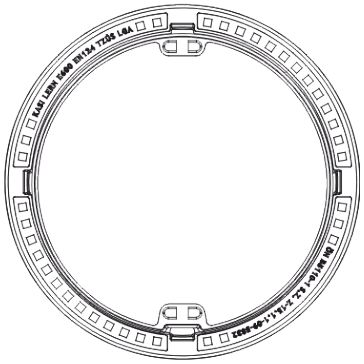

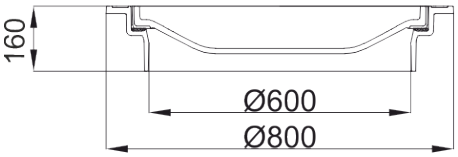

OTHER:

- Suitable for places with extreme traffic load
- chemical resistance of concrete XF4

KASI PUR
DAMPING INSERT

CONCRETE-CAST IRON LID

300 kg/m²
HATCH WITHOUT HINGE

KASI spol. s.r.o., Chrudimská 1602, 535 01 Přelouč, tel.: +420 466 501 755, www.kasi.cz