

Manhole cover without ventilation in self-levelling frame

D400 - extreme traffic loads

Standard



Code	KDM62
Material	Concrete, Cast iron
Weight	121 kg
Norm	DIN1229, EN124-2
Package	10 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame

COVER:

- | Lid weight 91 kg
- | Integrated KASI-PUR damping insert with high resistance
- | With concrete fill without ventilation – unattractive to thieves

FRAME:



- | Frame height 160 mm, weight 30 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation in the running layer and load transfer outside the well
- | Installation without guide ring – frame can be inserted directly into well

OTHER:

- | Hatch comes without coating – painted options can be ordered



KDM62

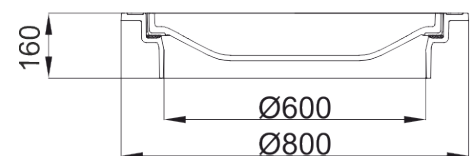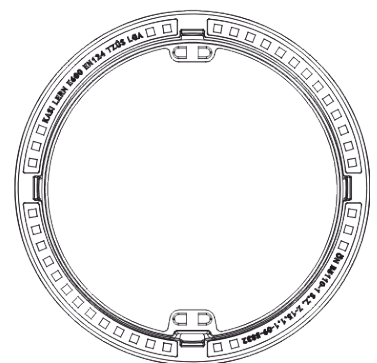

DAMPING INSERT



CONCRETE AND
CAST IRON LID



HATCH WITHOUT
HINGE

