

Manhole cover with ventilation in self-levelling frame

D400 - extreme traffic loads

Standard



Code	KDM63
Material	Cast iron
Weight	113 kg
Norm	EN124-2
Package	10 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame



KDM63

COVER:


- | Lid weight 83 kg
- | Permits your own design/logo
- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron without ventilation with non-slip design.

FRAME:

- | Frame height 160 mm, weight 30 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation in the running layer and load transfer outside the well
- | Installation without guide ring – frame can be inserted directly into well

OTHER:

- | custom motif on the lid possible
- | Hatch comes without coating – painted options can be ordered

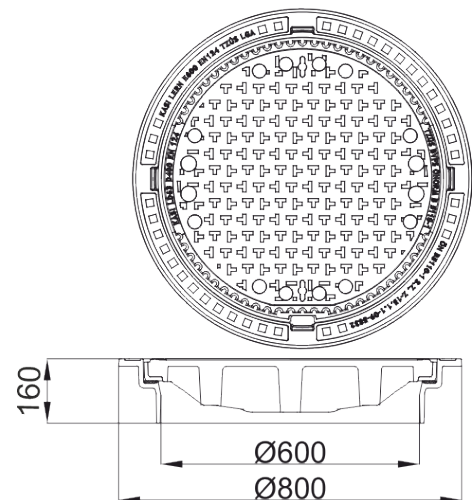

CUSTOM SOLUTIONS



DAMPING INSERT



HATCH WITHOUT HINGE

