

## Manhole cover without ventilation in self-levelling frame

D400 - extreme traffic loads

# Standard



Code	<b>KDM65</b>
Material	<b>Cast iron</b>
Weight	<b>113 kg</b>
Norm	<b>EN124-2</b>
Package	<b>10 ks/pal</b>
Load class	<b>Extreme traffic load</b>

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame



KDM65

### COVER:



- | Cast iron with ventilation with anti-slip design.
- | Lid weight 83 kg
- | Integrated KASI-PUR damping insert with high resistance
- | Permits your own design/logo

### FRAME:

- | Frame height 160 mm, weight 30 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation in the running layer and load transfer outside the well
- | Installation without guide ring – frame can be inserted directly into well

### OTHER:

- | custom motif on the lid possible
- | Hatch comes without coating – painted options can be ordered

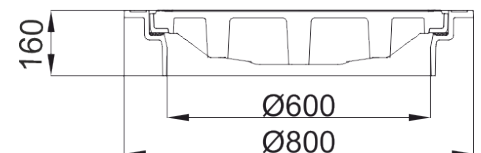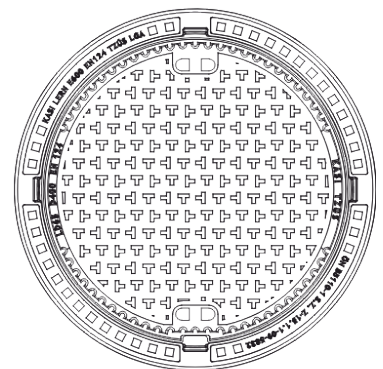

CUSTOM SOLUTIONS



DAMPING INSERT



HATCH WITHOUT HINGE

