

## Manhole cover without ventilation in self-levelling frame

D400 - extreme traffic loads

## Standard



Code	<b>KDM65xxxBLA</b>
Material	<b>Cast iron</b>
Weight	<b>113 kg</b>
Norm	<b>EN124-2</b>
Package	<b>10 ks/pal</b>
Load class	<b>Extreme traffic load</b>

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid, without spring-loaded lid locking in frame

### COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron with ventilation with anti-slip design.
- | Permits your own design/logo
- | Lid weight 83 kg

### FRAME:

- | Self-levelling frame without trap mounting
- | Frame height 160 mm, weight 30 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation without guide ring – frame can be inserted directly into well

### OTHER:

- | Hatch comes without coating – painted options can be ordered
- | Suitable for places with extreme traffic loads
- | custom motif on the lid possible

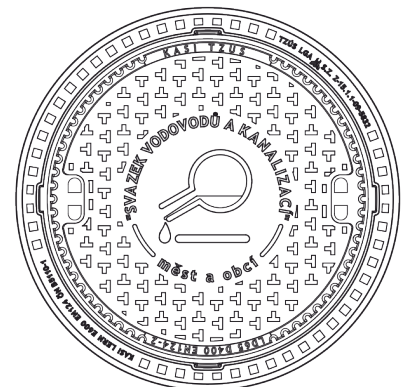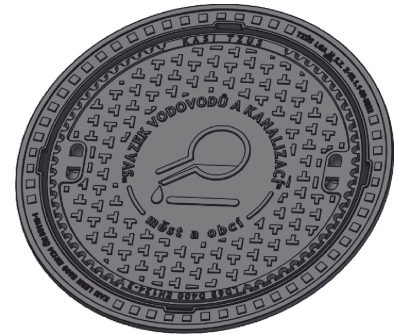

CUSTOM SOLUTIONS



DAMPING INSERT



HATCH WITHOUT HINGE