

Inlet grille in cast-iron concrete frame

E600 - areas exposed to high loads from heavy machinery

Europa 9



Code	KEB9N
Material	Concrete, Cast iron
Weight	124 kg
Norm	EN124-2
Package	10 ks/pal
Load class	Extreme traffic load

Poklop EUROPA 9 s pantem, víko litina kruhová vtoková mříž s otevřeným pantem, pružinové zajištění víka v rámu, E600, rám beton-litina v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Hinge with possibility of removal from the frame
- | Safety lock at 90°
- | Lid weight 45kg
- | Securing the lid in the frame with multi-point springs

FRAME:

- | Cast-concrete frame without mounting for the trap
- | Frame height 160 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings

OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with extreme traffic load
- | Lid safety lock at 90°

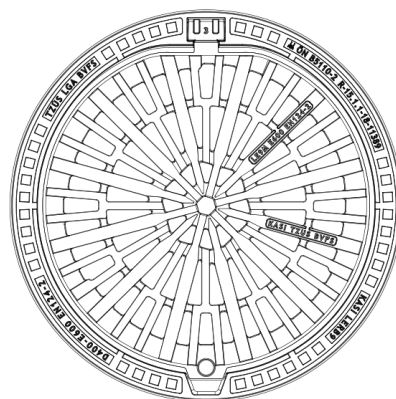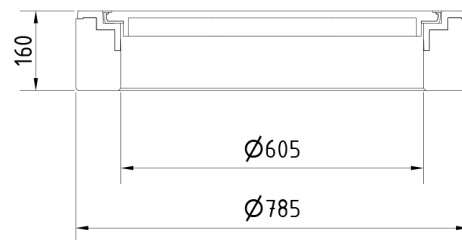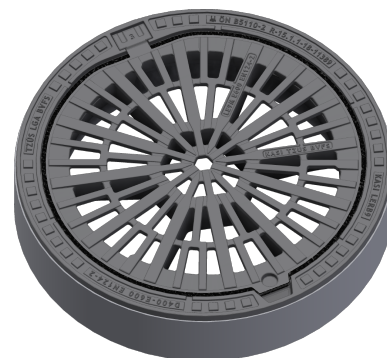

DAMPING INSERT



MAX. OPENING
ANGLE



RAINWATER
DRAINAGE