

## Manhole cover with ventilation in a cast iron frame with foot

E600 - areas exposed to high loads from heavy machinery

## Europa 9



|            |                           |
|------------|---------------------------|
| Code       | <b>KEL98</b>              |
| Material   | <b>Cast iron</b>          |
| Weight     | <b>69 kg</b>              |
| Norm       | <b>EN124-2</b>            |
| Package    | <b>16 ks/pal</b>          |
| Load class | <b>Heavy traffic load</b> |

Poklop EUROPA 9 s pantem, víko litina s ventilací s otevřeným pantem tichý design, pružinové zajištění víka v rámu, E600, rám litina patkový v.100mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

### COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Hinge with possibility of removal from the frame
- | Safety lock at 90°
- | Cast iron with ventilation and quiet design.
- | Lid weight 49kg

### FRAME:

- | Cast iron frame with foot without shoulder for trap
- | Frame height 100 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with high traffic load
- | Lid safety lock at 90°
- | custom lid motif possible

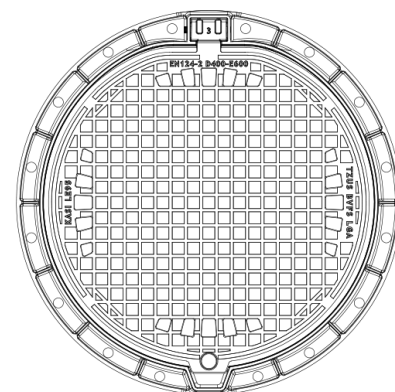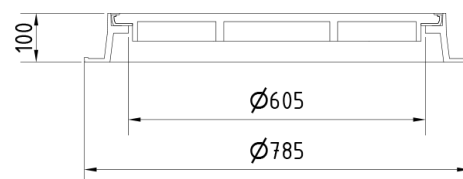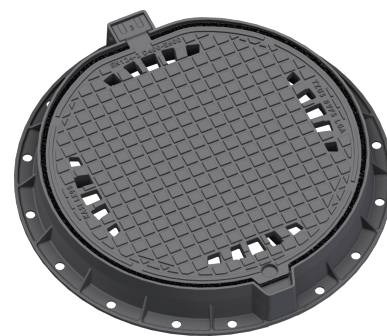

CUSTOMER  
SOLUTIONS



DAMPING INSERT



MAX. OPENING  
ANGLE



QUIET DESIGN