

Inlet grille in self-leveling frame

E600 - areas exposed to high loads from heavy machinery

Standard

Code	KEM2AM
Material	Cast iron
Weight	122 kg
Norm	DIN1229, EN124-2
Package	10 ks/pal
Load class	Heavy traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

COVER:



- Lid weight 91kg
- EPDM damping insert - resistant to oils

FRAME:

- Self-leveling frame without mounting for trap
- Frame height 160 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance
- Installation without guide ring - the frame can be inserted directly into the shaft

OTHER:

- The cover is supplied without surface treatment - painted variants can be ordered
- Suitable for places with high traffic load

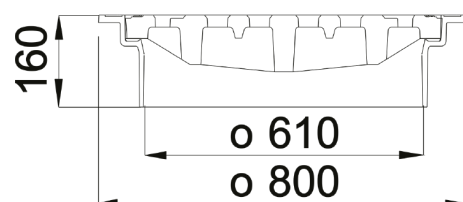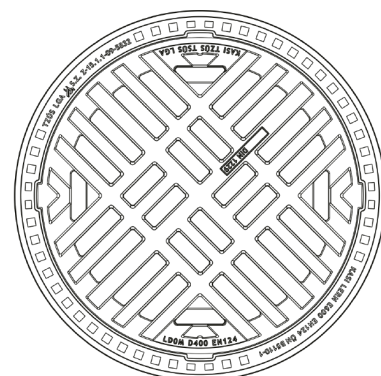

DAMPING INSERT



HATCH WITHOUT
HINGE



RAINWATER
DRAINAGE

