

## Manhole cover without ventilation in self-levelling frame

E600 - extreme loads

### EUROPA 9



Code	<b>KEM95</b>
Material	<b>Cast iron</b>
Weight	<b>80 kg</b>
Norm	<b>EN124-2</b>
Package	<b>14 ks/pal</b>
Load class	<b>Extreme traffic load</b>

Poklop EUROPA 9 s pantem, víko litina bez ventilace s uzavřeným pantem tichý design, pružinové zajištění víka v rámu, E600, rám litina samonivelační v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

#### COVER:



- | Lid weight 49 kg
- | Lid secured in frame with multi-point springs
- | Integrated KASI-PUR damping insert with high resistance
- | Safety locking at 90°, max. opening 120°
- | Hinge secured with pivot preventing removal from frame

#### FRAME:

- | Frame height 160 mm, weight 31 kg
- | Use with BAR-V and BAR adjustment rings
- | Installation in the running layer and load transfer outside the well
- | Installation without guide ring – frame can be inserted directly into well
- | Suitable for places with extreme traffic loads

#### OTHER:

- | Option with screw locking
- | custom motif on the lid possible
- | Hatch comes without coating – painted options can be ordered

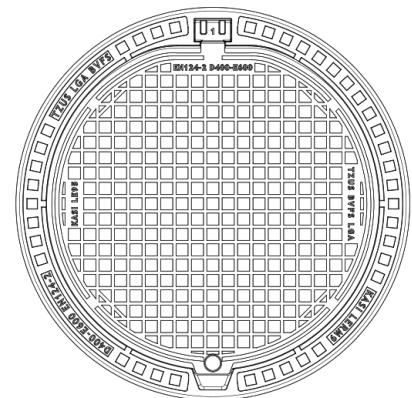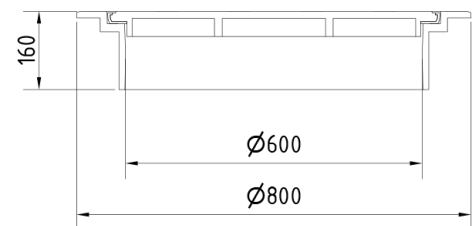

CUSTOM SOLUTIONS



DAMPING INSERT



MAX. OPENING ANGLE



THEFT PROTECTION



QUIET DESIGN