

Manhole cover with ventilation in a self-leveling frame

E600 - areas exposed to high loads from heavy machinery

Standard

Code	KEN21
Material	Concrete, Cast iron
Weight	125 kg
Norm	DIN19584-2, DIN1229, EN124-2
Package	10 ks/pal
Load class	Heavy traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

COVER:



- With concrete filling with ventilation - uninteresting for thieves
- Lid weight 91kg
- EPDM damping insert - resistant to oils

FRAME:

- Self-leveling frame with mounting for trap
- Frame height 160 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance
- Installation without guide ring - the frame can be inserted directly into the shaft

OTHER:

- Suitable for places with high traffic load
- chemical resistance of concrete XF4

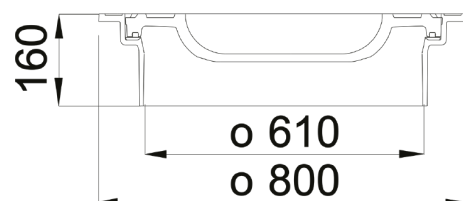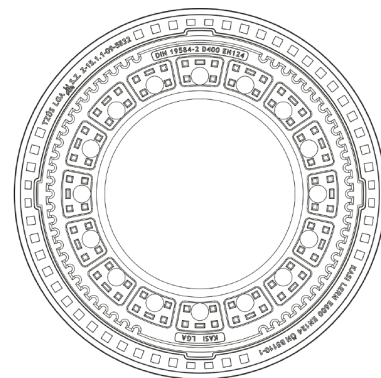

DAMPING INSERT



CONCRETE-CAST
IRON LID



HATCH WITHOUT
HINGE

