

Inlet grille in the distribution frame

F900 - extremely loaded areas

Standard

Code	KFGA0M
Material	Concrete, Cast iron
Weight	358 kg
Norm	EN124-2
Package	5 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining, without spring-loaded lid locking in frame

COVER:


Lid weight 82kg

FRAME:

Distribution frame 1200mm without mounting for catcher
Frame height 200 mm
Use with BAR-V and BAR adjustment rings
Integrated PUR damping insert with high resistance
Three handling hinges

OTHER:

The cover is supplied without surface treatment - painted variants can be ordered
Suitable for places with extreme traffic load

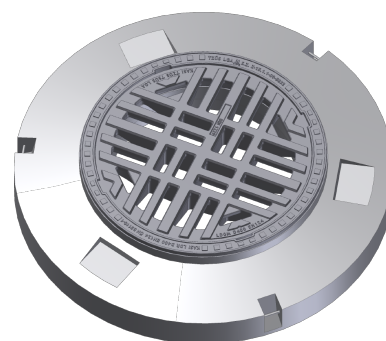

DAMPING INSERT



HATCH WITHOUT
HINGE



RAINWATER
DRAINAGE

