

Inlet grille in the distribution frame

F900 - extremely loaded areas

Standard

Code	KFGA2M
Material	Concrete, Cast iron
Weight	367 kg
Norm	DIN1229, EN124-2
Package	5 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

COVER:


- Lid weight 91kg
- EPDM damping insert - resistant to oils

FRAME:

- Distribution frame 1200mm without mounting for catcher
- Frame height 200 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance
- Three handling hinges

OTHER:

- The cover is supplied without surface treatment - painted variants can be ordered
- Suitable for places with extreme traffic load

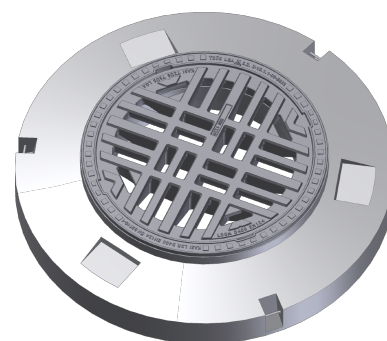

DAMPING INSERT



HATCH WITHOUT
HINGE



RAINWATER
DRAINAGE

