

Manhole cover with ventilation in the distribution frame

F900 - extremely loaded areas

Standard

Code	KFH21
Material	Concrete, Cast iron
Weight	367 kg
Norm	DIN19584-2, DIN1229, EN124-2
Package	5 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

COVER:


- With concrete filling with ventilation - uninteresting for thieves
- Lid weight 91kg
- EPDM damping insert - resistant to oils

FRAME:

- Distribution frame 1200mm with mounting for catcher
- Frame height 200 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance
- Three handling hinges

OTHER:

- Suitable for places with extreme traffic load
- chemical resistance of concrete XF4

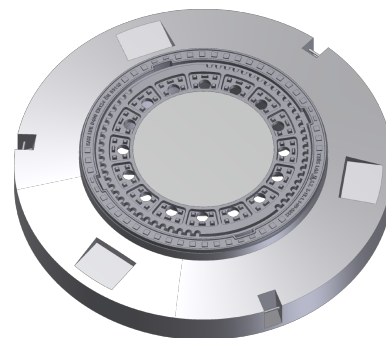

DAMPING INSERT



CONCRETE-CAST
IRON LID



HATCH WITHOUT
HINGE

