

## Manhole cover without ventilation in the distribution frame

F900 - extremely loaded areas

## Standard

|            |                            |
|------------|----------------------------|
| Code       | <b>KFH65</b>               |
| Material   | <b>Concrete, Cast iron</b> |
| Weight     | <b>361 kg</b>              |
| Norm       | <b>EN124-2</b>             |
| Package    | <b>5 ks/pal</b>            |
| Load class | <b>Heavy traffic load</b>  |

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

### COVER:


- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron without venting with anti-slip design.
- | Custom theme/logo option
- | Lid weight 85kg

### FRAME:

- | Distribution frame 1200mm with mounting for catcher
- | Frame height 200 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Three handling hinges

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Suitable for places with high traffic load
- | custom lid motif possible

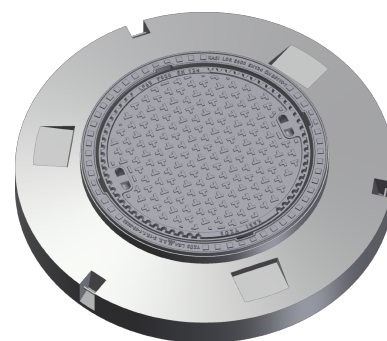

CUSTOMER  
SOLUTIONS



DAMPING INSERT

