


## Manhole cover without ventilation in the distribution frame

F900 - extremely loaded areas

## Standard



|            |                             |
|------------|-----------------------------|
| Code       | <b>KFI29</b>                |
| Material   | <b>Concrete, Cast iron</b>  |
| Weight     | <b>246 kg</b>               |
| Norm       | <b>DIN1229, EN124-2</b>     |
| Package    | <b>6 ks/pal</b>             |
| Load class | <b>Extreme traffic load</b> |

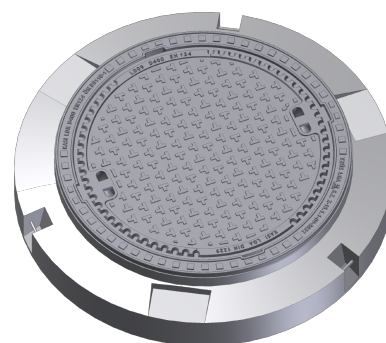

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

### COVER:

- | Cast iron without venting with anti-slip design.
- | Custom theme/logo option
- | Lid weight 90kg
- | EPDM damping insert - resistant to oils

### FRAME:

- | Distribution frame 1000mm without mounting for trap
- | Frame height 180 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Three handling hinges

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Suitable for places with extreme traffic load
- | custom lid motif possible



**CUSTOMER  
SOLUTIONS**



**DAMPING INSERT**



**HATCH WITHOUT  
HINGE**

