

Inlet grille in the distribution frame

F900 - extremely loaded areas

Standard

Code	KFIA0M
Material	Concrete, Cast iron
Weight	246 kg
Norm	EN124-2
Package	6 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining, without spring-loaded lid locking in frame

COVER:


Lid weight 82kg

FRAME:

Distribution frame 1000mm without mounting for trap
Frame height 180 mm
Suitable for replacing covers in places with slightly damaged cones.
Three handling hinges
Integrated PUR damping insert with high resistance

OTHER:

The cover is supplied without surface treatment - painted variants can be ordered
Suitable for places with extreme traffic load

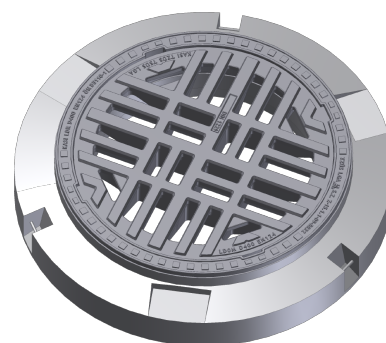

DAMPING INSERT



HATCH WITHOUT
HINGE



RAINWATER
DRAINAGE

