


Manhole cover without ventilation in the distribution frame

F900 - extremely loaded areas

Standard



Code	KFJ62
Material	Concrete, Cast iron
Weight	246 kg
Norm	DIN1229, EN124-2
Package	6 ks/pal
Load class	Extreme traffic load

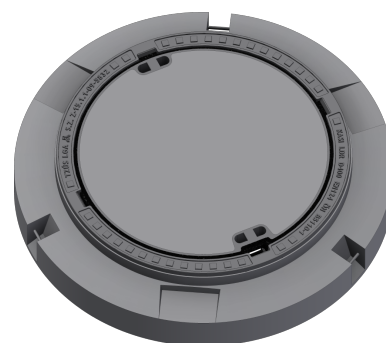

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

COVER:

- | Integrated KASI-PUR damping insert with high resistance
- | With concrete filling without ventilation - uninteresting for thieves
- | Lid weight 91kg

FRAME:

- | Distribution frame 1000mm with mounting for catcher
- | Frame height 180 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Three handling hinges

OTHER:

- | Suitable for places with extreme traffic load
- | chemical resistance of concrete XF4



DAMPING INSERT



CONCRETE-CAST
IRON LID



HATCH WITHOUT
HINGE

