

Inlet grille in the distribution frame

F900 - extremely loaded areas

Standard

Code	KFJA0M
Material	Concrete, Cast iron
Weight	237 kg
Norm	EN124-2
Package	6 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining, without spring-loaded lid locking in frame

COVER:


Lid weight 82kg

FRAME:

Distribution frame 1000mm with mounting for catcher
Use with BAR-V and BAR adjustment rings
Integrated PUR damping insert with high resistance
Three handling hinges
Suitable for replacing covers in places with slightly damaged cones.

OTHER:

The cover is supplied without surface treatment - painted variants can be ordered
Suitable for places with extreme traffic load

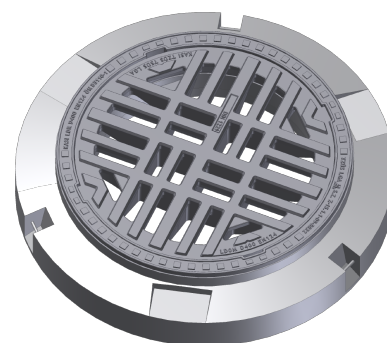

DAMPING INSERT



HATCH WITHOUT
HINGE



RAINWATER
DRAINAGE

