

Manhole cover with ventilation in a cast-iron concrete frame

F900 - extremely loaded areas

Standard

Code	KFT21
Material	Concrete, Cast iron
Weight	169 kg
Norm	DIN19584-2, DIN1229, EN124-2
Package	8 ks/pal
Load class	Extreme traffic load

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

COVER:



- With concrete filling with ventilation - uninteresting for thieves
- Lid weight 91kg
- EPDM damping insert - resistant to oils

FRAME:

- Frame height 160 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance
- Cast-concrete frame with mounting for trap

OTHER:

- Suitable for places with extreme traffic load
- chemical resistance of concrete XF4

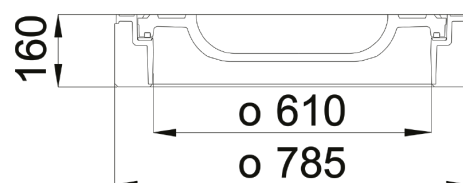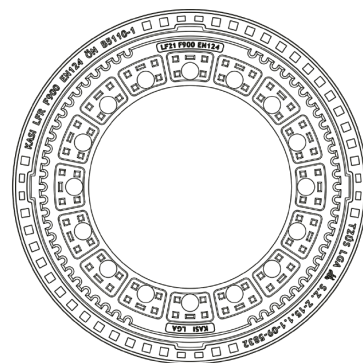

DAMPING INSERT



CONCRETE-CAST
IRON LID



HATCH WITHOUT
HINGE