

## Manhole cover with ventilation in cast iron frame with base B125 - pedestrian zones and parking areas

# Europa 7



Code	<b>KBLL72CxxxRD</b>
Material	<b>Cast iron</b>
Weight	<b>38 kg</b>
Norm	<b>EN124-2</b>
Package	<b>20 ks/pal</b>

Poklop s pantem víko zajištěné proti krádeži, horizontální PUR tlumící vložka na rámu, s ventilací, pružinové zajištění víka v rámu, barva, logo ŘSD

### COVER:


- | Machined contact surface of the lid to 0.3 mm
- | Cast iron without ventilation with non-slip design.
- | Hinge secured preventing removal from frame
- | Safety locking at 90°, max. opening 120°
- | Lid weight 25 kg

### FRAME:

- | Cast iron frame with base without trap mounting
- | Frame height 100 mm, weight 13 kg
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance

### OTHER:

- | Hatch comes without coating – painted options can be ordered
- | Option with screw locking
- | Safety locking of the lid at 90°, max. opening 120°
- | custom motif on the lid possible

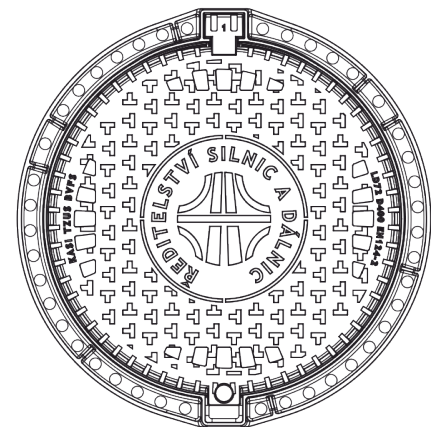

CUSTOM SOLUTIONS



DAMPING INSERT



MAX. OPENING ANGLE



THEFT PROTECTION