

## Manhole cover without ventilation in a cast-iron concrete frame

D400 - extreme traffic load

# Standard



|            |                             |
|------------|-----------------------------|
| Code       | <b>KDB69</b>                |
| Material   | <b>Concrete, Cast iron</b>  |
| Weight     | <b>161 kg</b>               |
| Norm       | <b>DIN1229, EN124-2</b>     |
| Package    | <b>8 ks/pal</b>             |
| Load class | <b>Extreme traffic load</b> |

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

### COVER:




- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron without venting with anti-slip design.
- | Custom theme/logo option
- | Lid weight 90kg

### FRAME:

- | Cast-concrete frame without mounting for the trap
- | Frame height 160 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Suitable for places with extreme traffic load
- | custom lid motif possible

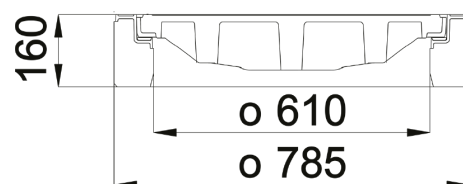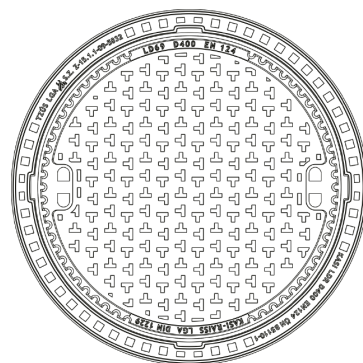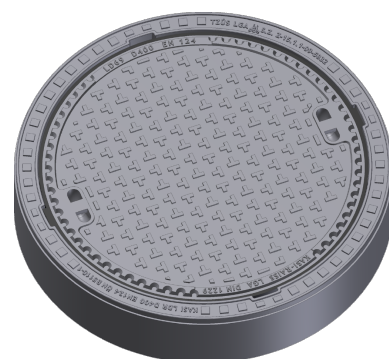

CUSTOMER  
SOLUTIONS



DAMPING INSERT



HATCH WITHOUT  
HINGE

