

## Manhole cover without ventilation in cast iron-concrete frame

D400 - heavy traffic loads

# EUROPA 9



|            |                            |
|------------|----------------------------|
| Code       | <b>KDB93xxxZD</b>          |
| Material   | <b>Concrete, Cast iron</b> |
| Weight     | <b>116 kg</b>              |
| Norm       | <b>EN124-2</b>             |
| Package    | <b>10 ks/pal</b>           |
| Load class | <b>Heavy traffic load</b>  |

Poklop EUROPA 9 s pantem, víko litina bez ventilace s otevřeným pantem, pružinové zajištění víka v rámu, D400, rám beton-litina v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku, logo VAS Žďár nad Sázavou

### COVER:


- | Integrated KASI-PUR damping insert with high resistance
- | Hinge enabling removal from frame
- | Custom motif-logo on the lid
- | Safety locking at 90°, max. opening 120°
- | Lid weight 37 kg

### FRAME:

- | Cast iron-concrete frame without trap mounting
- | Frame height 160 mm, weight 79 kg
- | Machined bearing surface of the frame to 0.1 mm
- | Use with BAR-V and BAR adjustment rings

### OTHER:

- | Hatch comes without coating – painted options can be ordered
- | Option with screw locking
- | Suitable for places with high traffic loads
- | Safety locking of the lid at 90°, max. opening 120°

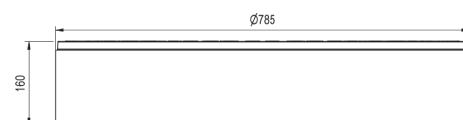

CUSTOM SOLUTIONS



DAMPING INSERT



MAX. OPENING ANGLE