

## Manhole cover with ventilation in a self-leveling frame

D400 - heavy traffic load

# Standard

|            |                                     |
|------------|-------------------------------------|
| Code       | <b>KDN21</b>                        |
| Material   | <b>Concrete, Cast iron</b>          |
| Weight     | <b>123 kg</b>                       |
| Norm       | <b>DIN19584-2, DIN1229, EN124-2</b> |
| Package    | <b>10 ks/pal</b>                    |
| Load class | <b>Heavy traffic load</b>           |

cover without hinge, horizontal PUR shock-absorbing lining on frame, EPDM shock-absorbing lining on cover, without spring-loaded lid locking in frame

### COVER:



- | With concrete filling with ventilation - uninteresting for thieves
- | Lid weight 90kg
- | EPDM damping insert - resistant to oils

### FRAME:

- | Self-leveling frame with mounting for trap
- | Frame height 200 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation without guide ring - the frame can be inserted directly into the shaft

### OTHER:

- | Suitable for places with high traffic load
- | chemical resistance of concrete XF4

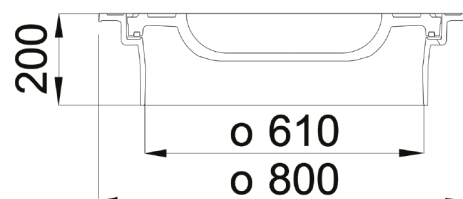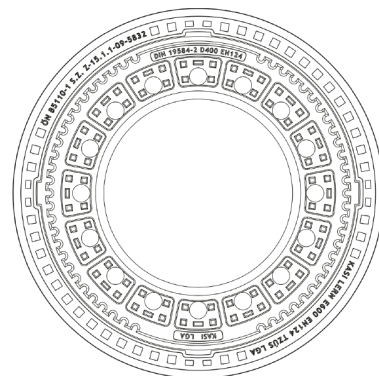

DAMPING INSERT



CONCRETE-CAST  
IRON LID



HATCH WITHOUT  
HINGE

