

Manhole cover with ventilation in self-levelling frame

E600 - extreme loads

EUROPA 9



Code	KEM94CxxxPK
Material	Cast iron
Weight	78 kg
Norm	EN124-2
Package	14 ks/pal
Load class	Extreme traffic load

Poklop EUROPA 9 s pantem, víko litina s ventilací s otevřeným pantem, pružinové zajištění víka v rámu, E600, rám litina samonivelační v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku, barva, logo Praha

COVER:


- | Integrated KASI-PUR damping insert with high resistance
- | Hinge enabling removal from frame
- | Custom motif-logo on the lid
- | Safety locking at 90°, max. opening 120°
- | Lid weight 47 kg

FRAME:

- | Self-levelling frame without trap mounting
- | Frame height 160 mm, weight 31 kg
- | Machined bearing surface of the frame to 0.1 mm
- | Use with BAR-V and BAR adjustment rings
- | Installation without guide ring – frame can be inserted directly into well

OTHER:

- | Hatch comes without coating – painted options can be ordered
- | Option with screw locking
- | Suitable for places with extreme traffic loads
- | Safety locking of the lid at 90°, max. opening 120°

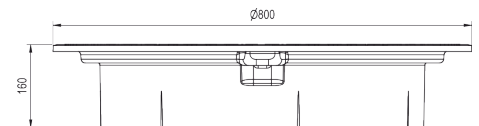

CUSTOM SOLUTIONS



DAMPING INSERT



MAX. OPENING ANGLE