

## Manhole cover with ventilation in self-levelling frame




E600 - extreme loads

### EUROPA 9



|            |                             |
|------------|-----------------------------|
| Code       | <b>KEM96</b>                |
| Material   | <b>Cast iron</b>            |
| Weight     | <b>80 kg</b>                |
| Norm       | <b>EN124-2</b>              |
| Package    | <b>14 ks/pal</b>            |
| Load class | <b>Extreme traffic load</b> |

Poklop EUROPA 9 s pantem, víko litina s ventilací s uzavřeným pantem tichý design, pružinové zajištění víka v rámu, E600, rám litina samonivelační v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

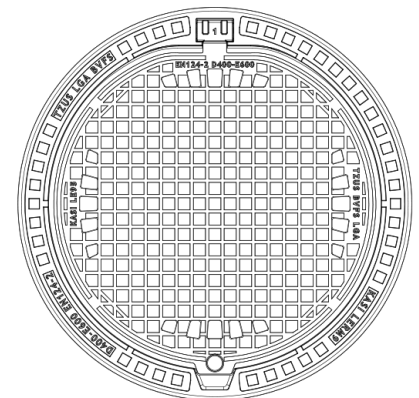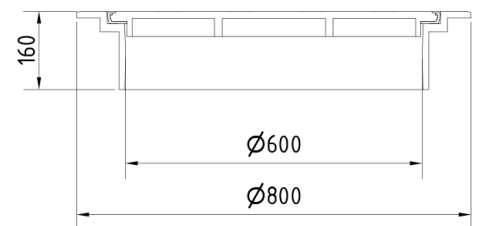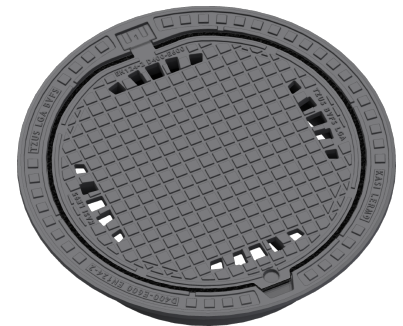

#### COVER:

- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron with ventilation with quiet design.
- | Lid weight 49 kg
- | Permits your own design/logo
- | Lid secured in frame with multi-point springs

#### FRAME:

- | Self-levelling frame without trap mounting
- | Frame height 160 mm, weight 21 kg
- | Use with BAR-V and BAR adjustment rings
- | Installation without guide ring – frame can be inserted directly into well
- | Installation in the running layer and load transfer outside the well

#### OTHER:

- | Hatch comes without coating – painted options can be ordered
- | Option with screw locking
- | Safety locking of the lid at 90°, max. opening 120°
- | custom motif on the lid possible



CUSTOM SOLUTIONS



DAMPING INSERT



MAX. OPENING ANGLE



THEFT PROTECTION



QUIET DESIGN