

Inlet grille in self-leveling frame

E600 - areas exposed to high loads from heavy machinery

Europa 9

Code	KEM9N
Material	Cast iron
Weight	76 kg
Norm	EN124-2
Package	14 ks/pal
Load class	Extreme traffic load

Poklop EUROPA 9 s pantem, víko litina kruhová vtoková mříž s otevřeným pantem, pružinové zajištění víka v rámu, E600, rám litina samonivelační v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

COVER:



- | Integrated KASI-PUR damping insert with high resistance
- | Hinge with possibility of removal from the frame
- | Safety lock at 90°
- | Lid weight 45kg
- | Securing the lid in the frame with multi-point springs

FRAME:

- | Self-leveling frame without mounting for trap
- | Frame height 160 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings
- | Installation without guide ring - the frame can be inserted directly into the shaft

OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with extreme traffic load
- | Safety lock

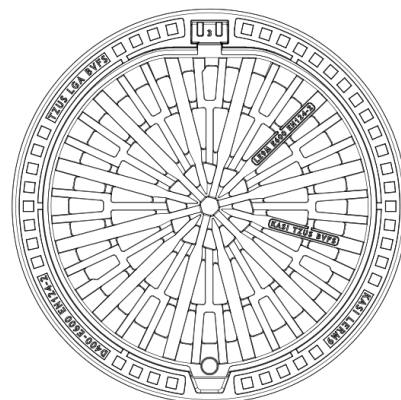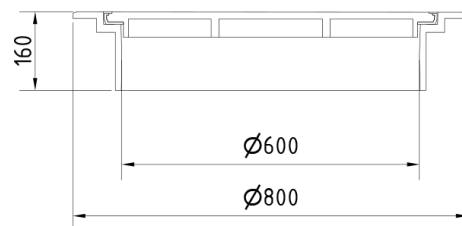

DAMPING INSERT



MAX. OPENING
ANGLE



RAINWATER
DRAINAGE