

## Manhole cover without ventilation in self-leveling frame

E600 - areas exposed to high loads from heavy machinery

## Europa 9



|            |                             |
|------------|-----------------------------|
| Code       | <b>KEM9Q</b>                |
| Material   | <b>Cast iron</b>            |
| Weight     | <b>80 kg</b>                |
| Norm       | <b>EN124-2</b>              |
| Package    | <b>14 ks/pal</b>            |
| Load class | <b>Extreme traffic load</b> |

Poklop EUROPA 9 s pantem, víko litina bez ventilace s uzavřeným pantem tichý design s mušlí, pružinové zajištění víka v rámu, E600, rám litina samonivelační v.160mm bez osazení pro lapač, horizontální a vertikální PUR tlumící vložka na víku

### COVER:



- | Cast iron non-vented with quiet design
- | Integrated KASI-PUR damping insert with high resistance
- | Hinge secured against removal from the frame
- | Safety lock at 90°
- | Custom theme/logo option

### FRAME:

- | Self-leveling frame without mounting for trap
- | Frame height 160 mm
- | Machined frame contact surface to 0.1mm
- | Use with BAR-V and BAR adjustment rings
- | Installation without guide ring - the frame can be inserted directly into the shaft

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Option of screw locking
- | Suitable for places with extreme traffic load

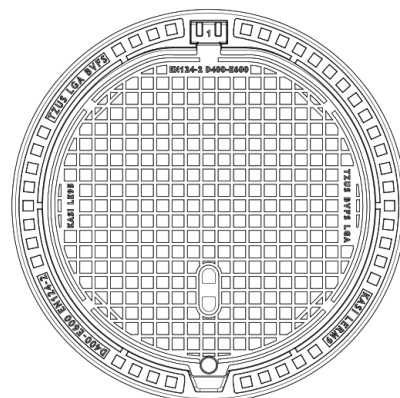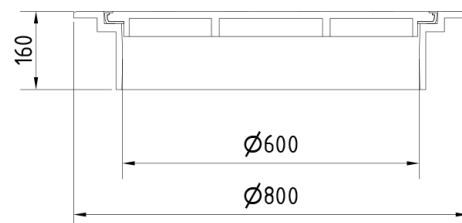

CUSTOMER  
SOLUTIONS



DAMPING INSERT



MAX. OPENING  
ANGLE



ANTI-THEFT  
PROTECTION



QUIET DESIGN